




Performance Criteria

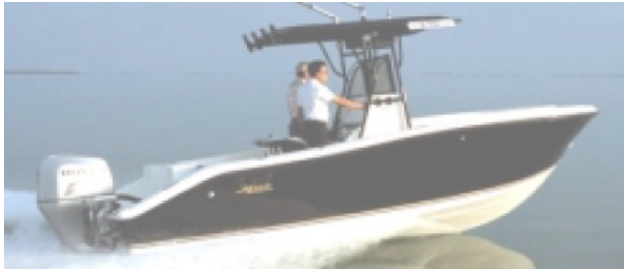

Manufacturer: Mako
Model: 232 Center Console
Hull Type: Fiberglass
Test Date: May 14, 2001
Mfg. Address: 2500 E. Kearney
 Springfield, MO 65898

Test Data

RPM	MPH	GPH	MPG
Idle	2.8	.40	7.0
1000	4.6	.75	6.14
1500	6.5	1.35	4.82
2000	7.6	2.25	3.38
2500	8.3	3.40	2.44
3000	13.0	5.45	2.39
3500	19.9	7.35	2.71
4000	26.0	9.30	2.78
4500	30.8	12.25	12.52
5000	35.2	14.20	2.48
5500 (WOT)	40.0	17.50	2.29

Length:	22' 9"
Beam:	8' 6"
Weight:	3,150 lbs
Max HP:	300 hp
Fuel Capacity:	150 gal

Power: Single BF200

Horsepower:	200
Displacement:	3.5 L
Weight:	589 lbs.
Gear Ratio:	1.86:1
Mounting Height:	2 nd Hole
Prop (Material/Blades)	Stainless (3)
Prop Manufacturer	Precision
Prop (Diameter/Pitch)	14 ¼ x 15

Test Conditions

No. of People:	2
Fuel Load:	
Total Weight:	4,961 lbs
Air Temperature:	
Test Conditions	
Elevation:	
Wind Velocity:	

Data may vary due to changes in weather, elevation and load conditions. Speed data gathered by GPS receiver.

Time to Plane: Seconds

Acceleration 0~20 MPH: Seconds