




Performance Criteria

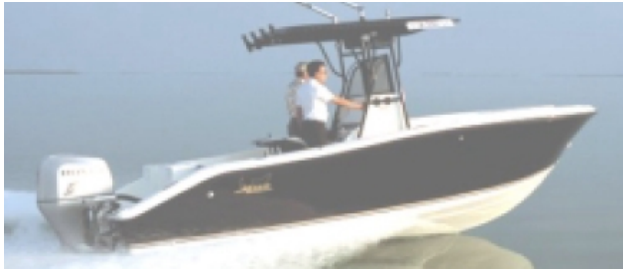

Manufacturer: Mako
Model: 232 Center Console
Hull Type: Fiberglass
Test Date: May 14, 2001
Mfg. Address: 2500 E. Kearney
 Springfield, MO 65898

Test Data

| RPM | MPH | GPH | MPG |
|------------|------|-------|------|
| Idle | 2.9 | .40 | 7.25 |
| 1000 | 4.8 | .65 | 7.38 |
| 1500 | 6.5 | 1.30 | 5.00 |
| 2000 | 7.7 | 2.15 | 3.58 |
| 2500 | 8.3 | 3.60 | 2.31 |
| 3000 | 13.4 | 5.35 | 2.50 |
| 3500 | 20.0 | 7.20 | 2.78 |
| 4000 | 26.5 | 9.40 | 2.82 |
| 4500 | 31.5 | 11.25 | 2.80 |
| 5000 | 35.8 | 14.05 | 2.55 |
| 5500 | 40.0 | 18.25 | 2.19 |
| 6000 (WOT) | 41.8 | 18.95 | 2.21 |

| | |
|----------------|-----------|
| Length: | 22' 9" |
| Beam: | 8' 6" |
| Weight: | 3,150 lbs |
| Max HP: | 300 hp |
| Fuel Capacity: | 150 gal |

Power: Single BF225

| | |
|------------------------|----------------------|
| Horsepower: | 225 |
| Displacement: | 3.5 L |
| Weight: | 589 lbs. |
| Gear Ratio: | 1.86:1 |
| Mounting Height: | 2 nd Hole |
| Prop (Material/Blades) | Stainless (3) |
| Prop Manufacturer | Precision |
| Prop (Diameter/Pitch) | 14 ¼ x 15 |

Test Conditions

| | |
|------------------|-----------|
| No. of People: | 2 |
| Fuel Load: | |
| Total Weight: | 4,961 lbs |
| Air Temperature: | |
| Test Conditions | |
| Elevation: | |
| Wind Velocity: | |

Data may vary due to changes in weather, elevation and load conditions. Speed data gathered by GPS receiver.

Time to Plane: Seconds

Acceleration 0~20 MPH: Seconds