


HONDA

Power

Equipment

Owner's Manual

EG3500X

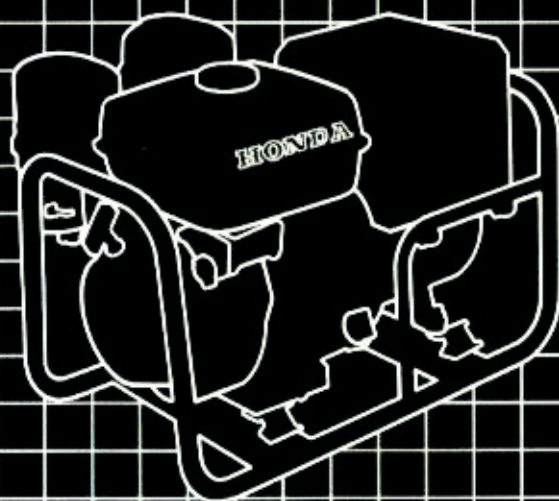

⚠ WARNING The generator is a potential source of electrical shock if misused. Do not expose the generator to moisture, rain or snow. Do not let the generator get wet, and do not operate it with wet hands.


Thank you for purchasing a Honda generator. We want to help you get the best results from your new generator and to operate it safely. This manual contains the information on how to do that; please read it carefully.

This owner's manual describes the operation and maintenance of the EG3500X Honda Generator. All information in this publication is based on the latest product information available at the time of printing. Honda Motor Co., Ltd. reserves the right to make changes at any time without notice and without incurring any obligation. No part of this publication may be reproduced without written permission.

This manual should be considered a permanent part of the generator and should remain with it if it is resold.

Safety Messages

Your safety and the safety of others is very important. We have provided important safety messages in this manual and on the generator. Please read these messages carefully.

A safety message alerts you to potential hazards that could hurt you or others. Each safety message is preceded by a safety alert symbol  and one of three words: DANGER, WARNING, or CAUTION.

These mean

 DANGER You WILL be KILLED or SERIOUSLY HURT if you don't follow instructions.

 WARNING You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

 CAUTION You CAN be HURT if you don't follow instructions.

Each message tells you what the hazard is, what can happen, and what you can do to avoid or reduce injury.

Damage Prevention Messages

You will also see other important messages that are preceded by the word NOTICE.

This word means:

NOTICE Your generator or other property could be damaged if you don't follow instructions.

The purpose of these messages is to help prevent damage to your generator, other property, or the environment.

CONTENTS

SAFETY	4
SAFETY LABEL LOCATIONS	4
SAFETY INFORMATION	6
COMPONENT IDENTIFICATION	8
 CONTROLS	 10
Engine Switch	10
Recoil Starter	10
Fuel Valve	11
Choke Lever	11
Circuit Breaker	12
Ground Terminal	12
Oil Alert System	13
Voltage Selector Switch (Dual Voltage System)	13
GENERATOR USE	14
Connections to a Building's Electrical System	14
Ground System	14
Special Requirements	14
AC Applications	15
AC Operation	16
AC Receptacle Selection	17
High Altitude Operation	18
PRE-OPERATION CHECK	19
Engine Oil	19
Fuel Recommendation	20
STARTING THE ENGINE/STOPPING THE ENGINE	23
Starting the engine	23
Stopping the engine	23


MAINTENANCE	24
Maintenance Schedule	24
Tool Kit	25
Engine Oil Change	26
Air Cleaner Service	27
Fuel Sediment Cup Cleaning	28
Spark Plug Service	29
Spark Arrester Maintenance	30
TRANSPORTING/STORAGE	31
Storage procedure	32
TROUBLESHOOTING	33
WIRING DIAGRAM	35
SPECIFICATIONS	36
CUSTOMER SERVICE INFORMATION	37
INDEX	38

SAFETY


SAFETY LABEL LOCATIONS

These labels warn you of potential hazards that can cause serious injury. Read them carefully.

If a label comes off or becomes hard to read, contact your Honda Generator dealer for a replacement.

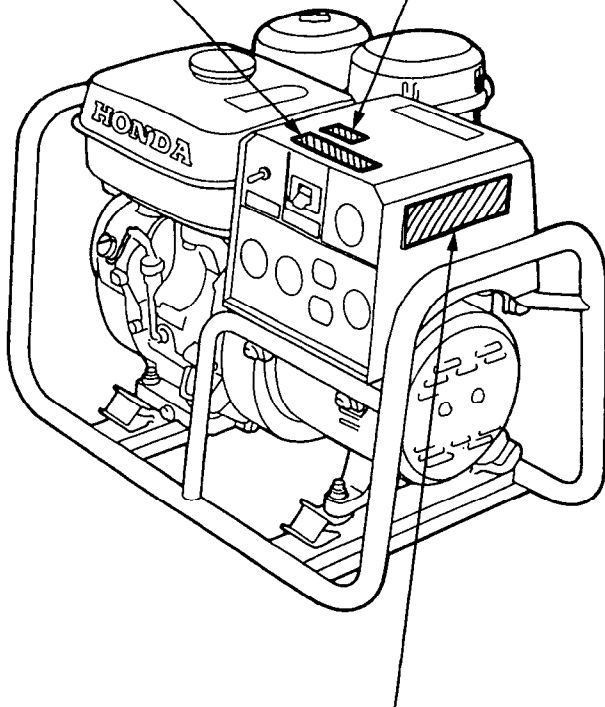

EG3500X HONDA MOTOR CO., LTD. MADE IN JAPAN (A)	
CAUTION ■ BE SURE TO FILL CRANKCASE WITH RECOMMENDED OIL BEFORE USING. FOR DETAILED EXPLANATION, SEE THE OWNER'S MANUAL.	AC VOLTAGE 120/240V FREQUENCY 60Hz RATED OUTPUT 3.0kVA MAX. OUTPUT 3.5kVA PHASE 1 FUEL GASOLINE (PETROL)




■ CHECK FOR SPILLED FUEL OR FUEL LEAKS.
STOP ENGINE BEFORE REFUELING.

■ CONTRÔLER QU'IL N'Y A NI FUITE NI ESSENCE
RÉPANDUE SUR L'APPAREIL.

■ ARRÊTER LE MOTEUR AVANT DE REFAIRE LE PLEIN
■ INSPECCIONAR PARA COMBUSTIBLE DERRAMADO
O ESCAPE.

PARAR MOTOR ANTES DE ECHAR.

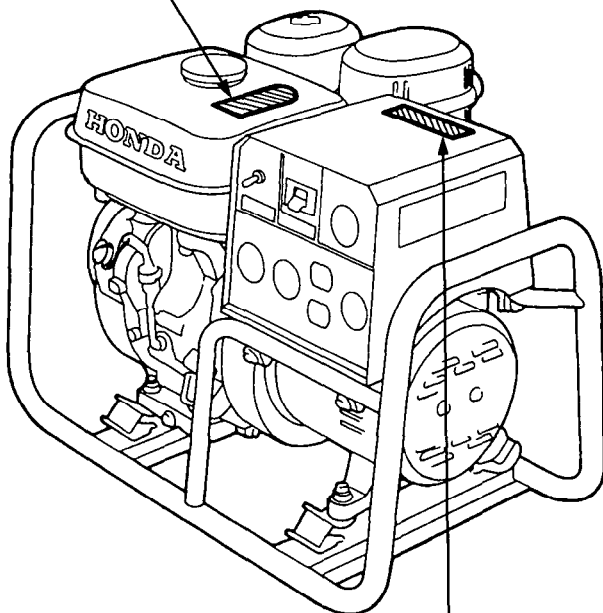

WARNING DO NOT USE INDOORS. EXHAUST GAS CONTAINS POISONOUS CARBON MONOXIDE.

ATTENTION NE PAS UTILISER DANS UN ENDROIT FERMÉ À CAUSE DU RISQUE D'EMPOISONNEMENT DU GAZ.

ATENCION NO LO USE EN LUGARES CERRADOS PORQUE EL MONOXIDE DE CARBONO ES VENENOSO.

SAFETY INFORMATION

Honda generators are designed to give safe and dependable service if operated according to instructions. Read and understand this owner's manual before operating your generator. You can help prevent accidents by being familiar with your generator's controls, and by observing safe operating procedures

Operator Responsibility

- Know how to stop the generator quickly in case of emergency.
- Understand the use of all generator controls, output receptacles, and connections.
- Be sure that anyone who operates the generator receives proper instruction. Do not let children operate the generator without parental supervision.

Carbon Monoxide Hazards

- Exhaust contains poisonous carbon monoxide, a colorless and odorless gas. Breathing exhaust can cause loss of consciousness and may lead to death.
- If you run the generator in an area that is confined, or even partially enclosed, the air you breathe could contain a dangerous amount of exhaust gas. To keep exhaust gas from building up, provide adequate ventilation.


Electric Shock Hazards


- The generator produces enough electric power to cause a serious shock or electrocution if misused.
- Using a generator or electrical appliance in wet conditions, such as rain or snow, or near a pool or sprinkler system, or when your hands are wet, could result in electrocution. Keep the generator dry.
- If the generator is stored outdoors, unprotected from the weather, check all electrical components on the control panel, before each use. Moisture or ice can cause a malfunction or short circuit in electrical components which could result in electrocution.
- Do not connect to a building's electrical system unless an isolation switch has been installed by a qualified electrician.

Fire and Burn Hazards

- The exhaust system gets hot enough to ignite some materials.
 - Keep the generator at least 1 meter (3 feet) away from buildings and other equipment during operation.
 - Do not enclose the generator in any structure.
 - Keep flammable materials away from the generator.
- The muffler becomes very hot during operation and remains hot for a while after stopping the engine. Be careful not to touch the muffler while it is hot. Let the engine cool before storing the generator indoors.
- Gasoline is extremely flammable and is explosive under certain conditions. Do not smoke or allow flames or sparks where the generator is refueled or where gasoline is stored. Refuel in a well-ventilated area with the engine stopped.
- Fuel vapors are extremely flammable and may ignite after the engine has started. Make sure that any spilled fuel has been wiped up before starting the generator.

COMPONENT IDENTIFICATION

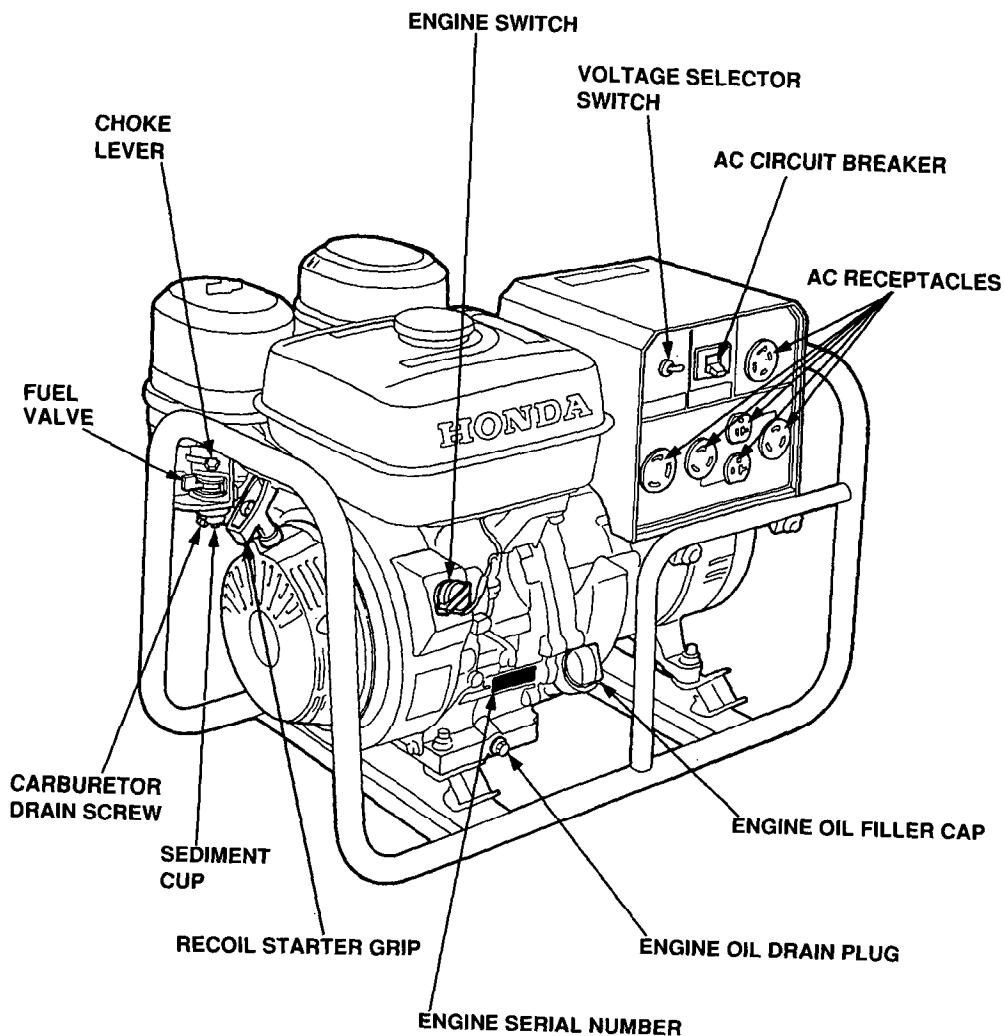

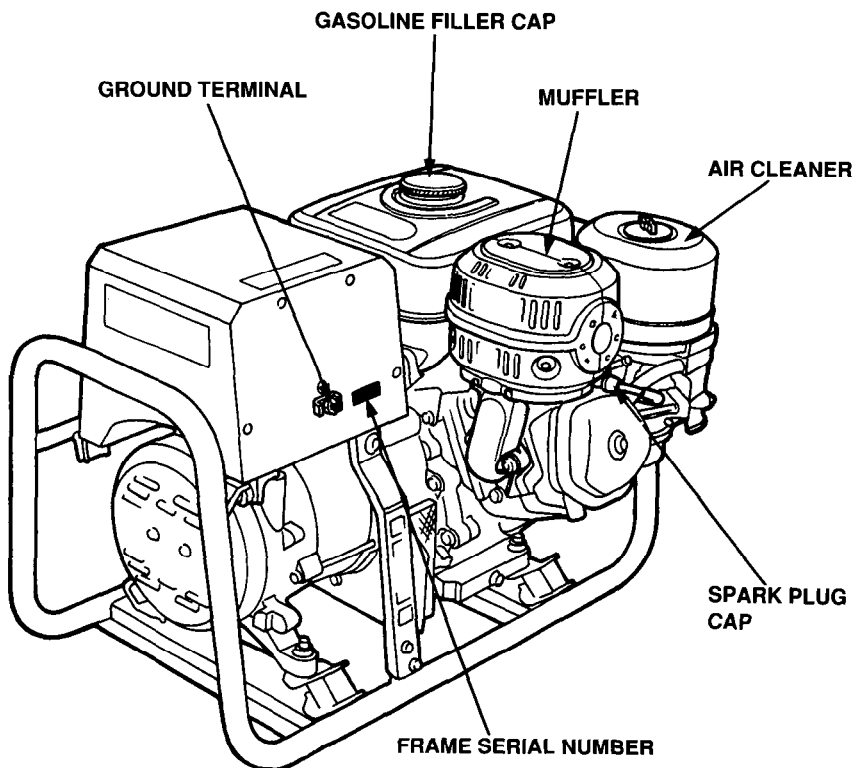

- * Record the engine and frame serial numbers for your future reference. Refer to these serial numbers when ordering parts, and when making technical or warranty inquiries (see page 37)

Frame serial number: _____
Engine serial number: _____

CONTROLS


Engine Switch

To start and stop the engine.

Switch position:

OFF: To stop the engine.

ON: To run the engine.

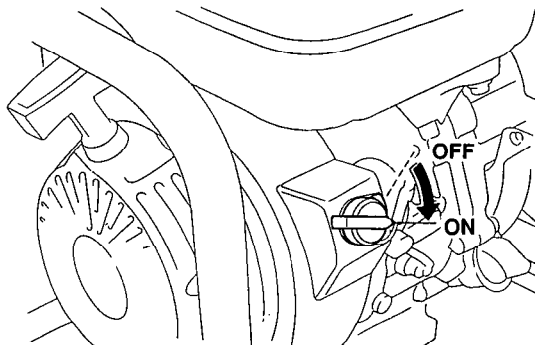


ENGINE SWITCH

Recoil Starter


To start the engine, pull the starter grip lightly until resistance is felt, then pull briskly.

NOTICE Do not allow the starter to snap back against the engine. Return it gently to prevent damage to the starter.

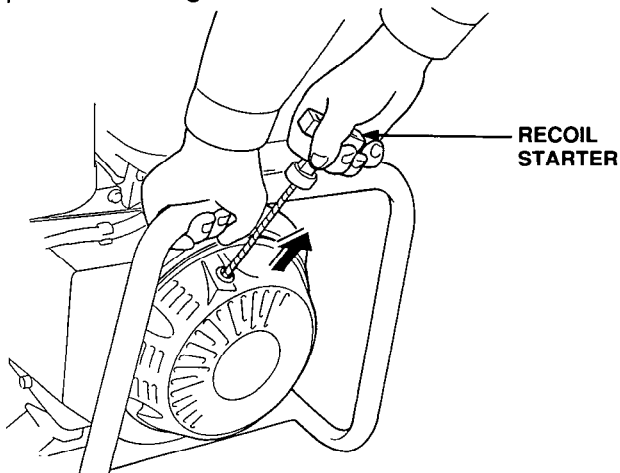


Fuel Valve

The fuel valve is located on the carburetor. When the valve lever is in the ON position, fuel is allowed to flow from the fuel tank to the carburetor. Be sure to return the lever to OFF after stopping the engine.

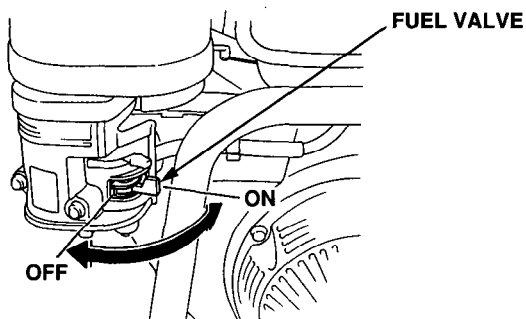

Choke Lever


The choke lever is used to provide proper starting mixture when the engine is cold. It can be opened and closed by operating the valve lever manually. Turn the lever out toward CLOSE to enrich the mixture.

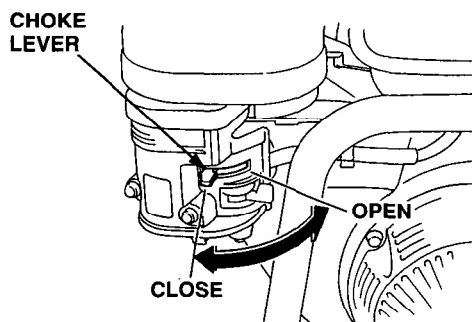

Circuit Breaker

The circuit breaker will automatically switch OFF if there is a short circuit or a significant overload of the generator at the receptacle. If the circuit breaker is switched OFF automatically, check that the appliance is working properly and does not exceed the rated load capacity of the circuit before switching the circuit breaker ON again.

The circuit breaker may be used to switch the generator power ON or OFF.

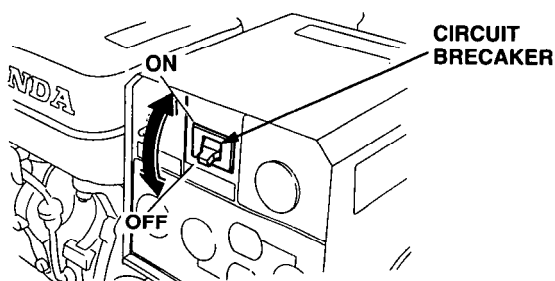


Ground Terminal

The generator ground terminal is connected to the frame of the generator, the metal non-current carrying parts of the generator, and the ground terminals of each receptacle.


Before using the ground terminal, consult a qualified electrician, electrical inspector or local agency having jurisdiction for local codes or ordinances that apply to the intended use of the generator.

GROUND TERMINAL

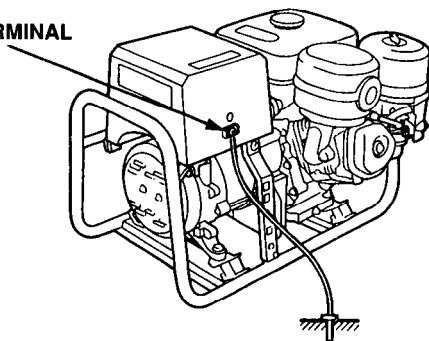

Oil Alert System

The Oil Alert system is designed to prevent engine damage caused by an insufficient amount of oil in the crankcase. Before the oil level in the crankcase can fall below a safe limit, the Oil Alert system will automatically stop the engine (the engine switch will remain in the ON position). If the engine stops and will not restart, check the engine oil level (p. 19) before troubleshooting in the other areas.

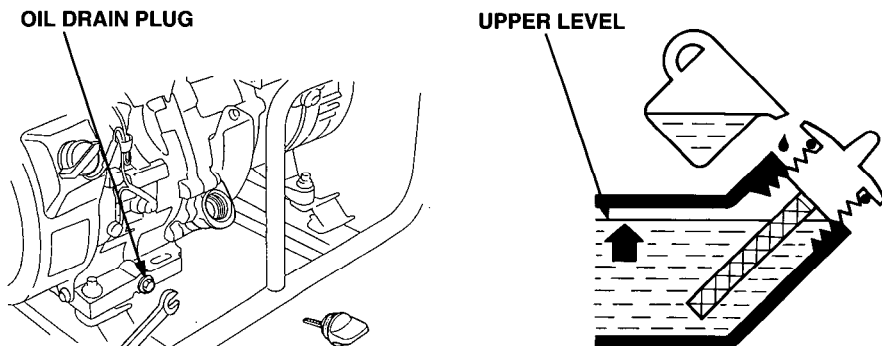


Voltage Selector Switch (Dual Voltage System)

The voltage selector switches the main power carrying windings of the generator to produce "120V ONLY" or "120/240V". If a 240V appliance is connected to the 4-prong receptacle, the switch must be in the "120/240V" position. If a 120V appliance ONLY is being connected to any of the 120V 3-prong receptacles, select the "120V ONLY" position.

120/240V: The 120V and 120/240V receptacles can be used simultaneously.

120V ONLY: ONLY the 120V receptacles can be used. Do not use the 120/240V receptacle in this position. Rated power will be available at the 120V 30A twist lock receptacle.

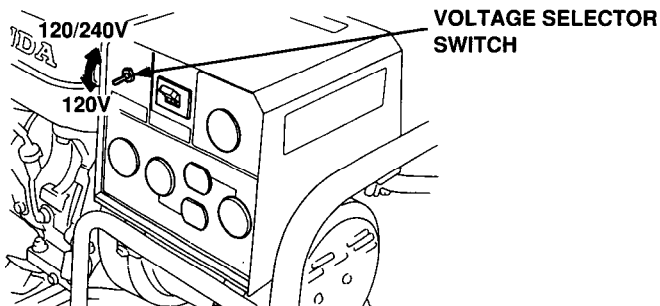

GENERATOR USE

Connections to a Building's Electrical System

Connections for standby power to a building's electrical system must be made by a qualified electrician. The connection must isolate the generator power from utility power, and must comply with all applicable laws and electrical codes.

⚠ WARNING Improper connections to a building's electrical system can allow electrical current from the generator to backfeed into the utility lines. Such backfeed may electrocute utility company workers or others who contact the lines during a power outage. Consult the utility company or a qualified electrician

NOTICE Improper connections to a building's electrical system can allow electrical current from the utility company to backfeed into the generator. When utility power is restored, the generator may explode, burn, or cause fires in the building's electrical system.

Ground System

Honda portable generators have a system ground that connects generator frame components to the ground terminals in the AC output receptacles. The system ground is not connected to the AC neutral wire. If the generator is tested by a receptacle tester, it will not show the same ground circuit condition as for a home receptacle.

Special Requirements

There may be Federal or State Occupational Safety and Health Administration (OSHA) regulations, local codes, or ordinances that apply to the intended use of the generator. Please consult a qualified electrician, electrical inspector, or the local agency having jurisdiction.

- In some areas, generators are required to be registered with local utility companies.
- If the generator is used at a construction site, there may be additional regulations which must be observed.

AC Applications

Before connecting an appliance or power cord to the generator:

- Make sure that it is in good working order. Faulty appliances or power cords can create a potential for electrical shock.
- If an appliance begins to operate abnormally, becomes sluggish or stops suddenly, turn it off immediately. Disconnect the appliance, and determine whether the problem is the appliance, or if the rated load capacity of the generator has been exceeded.
- Make sure that the electrical rating of the tool or appliance does not exceed that of the generator. Never exceed the maximum power rating of the generator. Power levels between rated and maximum may be used for no more than 30 minutes.

NOTICE Substantial overloading will open the circuit breaker. Exceeding the time limit for maximum power operation or slightly overloading the generator may not switch the circuit breaker OFF, but will shorten the service life of the generator.

Limit operation requiring maximum power to 30 minutes.

Maximum power is:

3.5 KVA

For continuous operation, do not exceed the rated power.

Rated power is:

3.0 KVA

In either case, the total power requirements (VA) of all appliances connected must be considered. Appliance and power tool manufacturers usually list rating information near the model number or serial number.


AC Operation

1. Start the engine (refer to page 23).
2. Turn the voltage selector switch to either position.

With the voltage selector switch in the "120/240V" position, you can use the 120V and 120/240V receptacles simultaneously. If you are NOT using the 120/240V receptacle, but require more power from the 120V twist lock receptacle, then select the "120V ONLY" position.

3. Switch ON the AC circuit breaker.

4. Plug in the appliance.
Most motorized appliances require more than their rated wattage for startup.

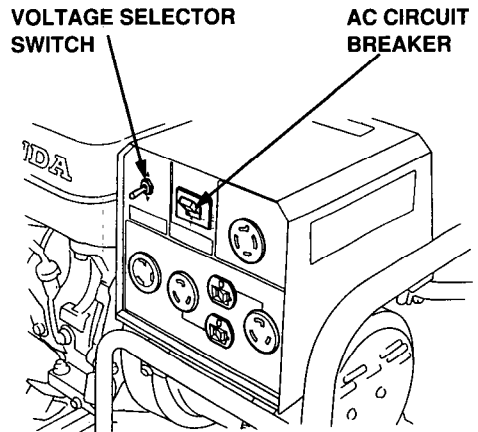

Do not exceed the current limit specified for any one receptacle. If an overloaded circuit causes the AC circuit breaker or circuit protector to switch OFF, reduce the electrical load on the circuit, wait a few minutes and then reset the circuit breaker.

AC Receptacle Selection

The generator has two separate main power producing circuits. These two circuits supply equal power to receptacles shown when the voltage selector switch is in the 120/240 V position.

When two or more receptacles are used; prevent overloading by dividing the load between the two power circuits.

The chart below shows the rated load in amperes that can be connected to each receptacle to balance the generator.


The total rated ampere draw is 25.0A.

Main power circuit	Receptacles powered by each main circuit	Power distribution
Main Circuit I	1, 3, 5 and 6	$1 + 3 + 5 + 6 = 12.5A \text{ max.}$
Main Circuit II	2, 4 and 7	$2 + 4 + 7 = 12.5A \text{ max.}$

* The table shows the specifications when the 120/240V Twist Lock Receptacle is used for 120V.

Example:

Receptacle 3 has a 10A load connected to it. Receptacle 5 has a 10A load connected to it. Both receptacles are powered by main power circuit II. The equation tells us that the total power draw on Circuit II is 20A. This is a substantial overload of this circuit. To eliminate the excess power draw on circuit II, the load from receptacle 5 should be switched to receptacle 2. Now circuit I is powering the 10A load (less than 12.5A) and circuit II is powering the 10A load (less than 12.5A).

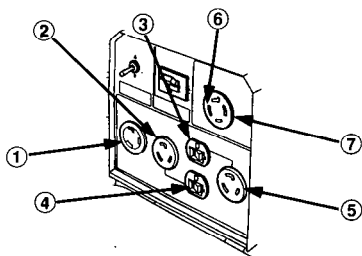

- ① 120 V 30A
- ② 120 V 20A
- ③ 120 V 20A
- ④ 120 V 20A
- ⑤ 120 V 20A
- ⑥ 120/240 V 20A
- ⑦ 120/240 V 20A

High Altitude Operation

At high altitude, the standard carburetor air-fuel mixture will be excessively rich. Performance will decrease, and fuel consumption will increase.

High altitude performance can be improved by installing a smaller diameter main fuel jet in the carburetor and readjusting the pilot screw. If you always operate the engine at altitudes higher than 6,000 feet above sea level, have an authorized Honda generator dealer perform this carburetor modification.

Even with suitable carburetor jetting, engine horsepower will decrease approximately 3.5% for each 1,000 foot increase in altitude. The effect of altitude on horsepower will be greater than this if no carburetor modification is made.

NOTICE If a generator jetted for high altitude is used at a lower altitude the lean air fuel mixture will reduce performance and may overheat or seriously damage the engine.

PRE-OPERATION CHECK

Engine oil




NOTICE Engine oil is a major factor affecting engine performance and service life. Non-detergent and 2-stroke engine oils will damage the engine and are not recommended.

Check the oil level **BEFORE EACH USE** with the generator on a level surface with the engine stopped.

Use Honda 4-stroke oil, or an equivalent high detergent, premium quality motor oil certified to meet or exceed U.S. automobile manufacturer's requirements for Service Classification SG, SF/CC, CD. Motor oils classified SG, SF/CC, CD will show this designation on the container.

SAE 10W-30 is recommended for general, all-temperature use. Other viscosities shown in the chart may be used when the average temperature in your area is within the indicated range.

1. Remove the oil filler cap and wipe the dipstick clean.
2. Check the oil level by inserting the dipstick into the filler neck without screwing it in.
3. If the level is low, fill to the top of the oil filler neck with the recommended oil.

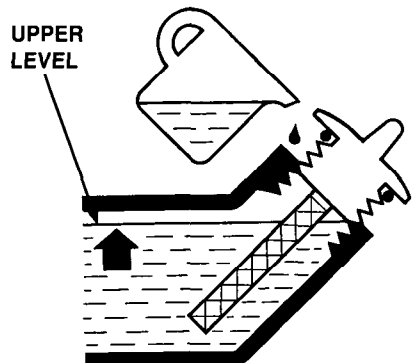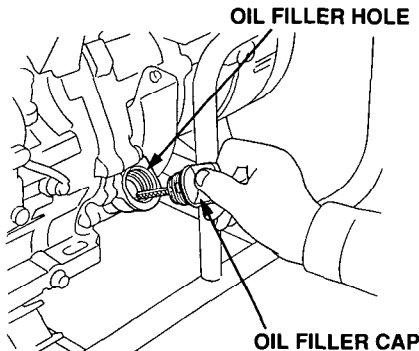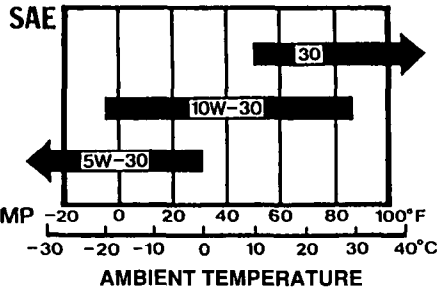


Fuel Recommendation

1. Remove the filler cap and check fuel level.
2. Refill the tank if the fuel level is low. Do not fill above the shoulder of the fuel strainer.

A WARNING

- Gasoline is extremely flammable and is explosive under certain conditions.
- Refuel in a well-ventilated area with the engine stopped. Do not smoke or allow flames or sparks in the area where the engine is refueled or where gasoline is stored.
- Do not overfill the fuel tank (there should be no fuel in the filler neck). After refueling, make sure the tank cap is closed properly and securely. Be careful not to spill fuel when refueling. Spilled fuel or fuel vapor may ignite. If any fuel is spilled, make sure the area is dry before starting the engine.
- Avoid repeated or prolonged contact with skin or breathing of vapor.
- **KEEP OUT OF REACH OF CHILDREN.**

Fuel tank capacity: 6.0 ℓ (1.59 US gal, 1.32 Imp gal)

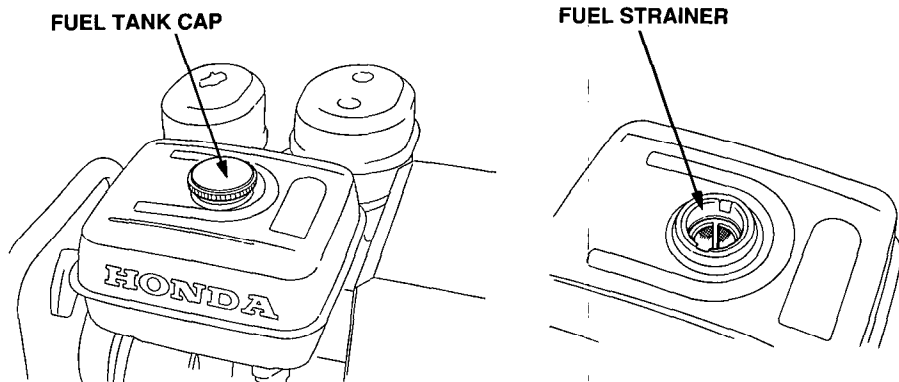

Use gasoline with a pump octane rating of 86 or higher

We recommend unleaded gasoline because it produces fewer engine and spark plug deposits and extends exhaust system life.

Never use stale or contaminated gasoline or oil/gasoline mixture. Avoid getting dirt or water in the fuel tank.

Occasionally you may hear light “spark knock” or “pinging” (metallic rapping noise) while operating under heavy loads. This is no cause for concern.

If spark knock or pinging occurs at a steady engine speed, under normal load, change brands of gasoline. If spark knock or pinging persists, see an authorized Honda generator dealer.

NOTICE **Running the engine with persistent spark knock or pinging can cause engine damage.**

Running the engine with persistent spark knock or pinging is misuse, and the Distributor's Limited Warranty does not cover parts damaged by misuse.

Oxygenated Fuels

Some gasolines are being blended with alcohol or an ether compound to increase the octane. These gasolines are collectively referred to as oxygenated fuels. Some areas of the United States use oxygenated fuels to help meet clean air standards.

If you use an oxygenated fuel, be sure its pump octane rating is 86 or higher.

Ethanol (ethyl or grain alcohol)

Gasoline containing more than 10% ethanol by volume may cause starting and/or performance problems. Gasoline containing ethanol may be marketed under the name “Gasohol”.

Methanol (methyl or wood alcohol)

Gasoline containing methanol must contain cosolvents and corrosion inhibitors to protect the fuel system. Gasoline containing more than 5% methanol by volume may cause starting and/or performance problems and may damage metal, rubber and plastic parts of your fuel system.

MTBE (methyl tertiary butyl ether)

You may use gasoline containing up to 15% MTBE by volume.

Before using an oxygenated fuel, try to confirm the fuel's contents. Some states (provinces in Canada) require this information to be posted on the pump. If you notice any undesirable operating symptoms, switch to a conventional unleaded gasoline. Fuel system damage or performance problems resulting from the use of an oxygenated fuel are not the responsibility of Honda and are not covered under warranty.

NOTICE Oxygenated fuels can damage paint and plastic. Be careful not to spill fuel when filling your fuel tank. Damage caused by spilled fuel is not covered under warranty.

STARTING THE ENGINE/STOPPING THE ENGINE

STARTING THE ENGINE

1. Make sure that the AC circuit breaker is in the OFF position.
The generator may be hard to start if a load is connected.
2. Turn the fuel valve to the ON position.
3. Turn the choke lever to the CLOSE position.
4. Turn the engine switch to the On position.
5. Pull the starter grip lightly until resistance is felt, then pull briskly.

NOTICE Do not allow the starter grip to snap back against the engine.
Return it gently to prevent damage to the starter or housing.

6. As the engine warm up, slowly turn the choke lever to OPEN position.

STOPPING THE ENGINE

In an emergency:

1. To stop the engine in an emergency, turn the engine switch to the OFF position.

In normal use:

1. Turn the AC circuit breaker to the OFF position.
2. Turn the engine switch to the OFF position.
3. Turn the fuel valve to the OFF position.

MAINTENANCE

Periodic maintenance and adjustment is necessary to keep the generator in good operating condition. Perform the service and inspection at the intervals shown in the Maintenance schedule below.

⚠ WARNING Exhaust gas contains poisonous carbon monoxide. Shut off the engine before performing any maintenance. If the engine must be run, make sure the area is well ventilated.

NOTICE Use only genuine HONDA parts or their equivalent for maintenance or repair. Replacement parts which are not of equivalent quality may damage the generator.

MAINTENANCE SCHEDULE

REGULAR SERVICE PERIOD Performed at every indicated month or operating hour interval, whichever comes first.		Each use	First month or 20 Hrs. (3)	Every 3 months or 50 Hrs. (3)	Every 6 months or 100 Hrs. (3)	Every year or 300 Hrs. (3)
ITEM						
Engine oil	Check level	o				
	Change		o		o	
Air cleaner	Check	o				
	Clean			o (1)		
Sediment Cup	Clean				o	
Spark plug	Check-Clean				o	
Spark Arrester	Clean				o	
Valve clearance	Check-Adjust					o (2)
Fuel tank and strainer	Clean					o (2)
Fuel line	Check (Replace if necessary)	Every 2 years (2)				

(1) Service more frequently when used in dusty areas.

(2) These items should be serviced by an authorized Honda generator dealer, unless the owner has the proper tools and is mechanically proficient. See the Honda Shop Manual.

(3) For professional commercial use, log hours of operation to determine proper maintenance intervals.

Tool kit


The tools supplied with the generator will help you to perform the owner maintenance procedures listed on the following page. Always keep this tool kit with the generator.



10 × 12 mm WRENCH



SCREW DRIVER




PLUG WRENCH



DRIVER HANDLE



HANDLE BAR



TOOL BAG


Engine Oil Change

Drain the oil while the engine is warm to assure complete and rapid draining.


1. Remove the drain plug and sealing washer, oil filler cap, and drain the oil.
2. Install the drain plug and sealing washer. Tighten the plug securely.
3. Refill with the recommended oil (see page 19) and check the level.

Oil capacity: 1.1 ℓ (1.16 US qt, 0.97 Imp qt)

OIL DRAIN PLUG

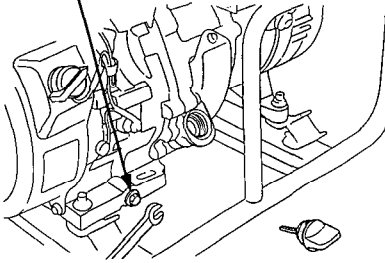

UPPER LEVEL

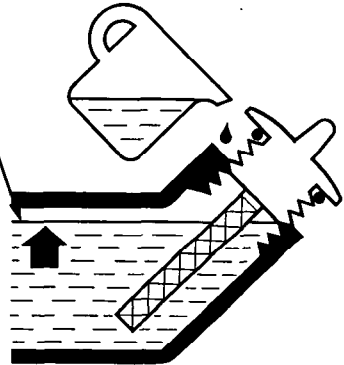

⚠ CAUTION Used motor oil may cause skin cancer if repeatedly left in contact with the skin for prolonged periods. Although this is unlikely unless you handle used oil on a daily basis, it is still advisable to thoroughly wash your hands with soap and water as soon as possible after handling used oil.

Please dispose of used motor oil and containers in a manner that is compatible with the environment. We suggest you take it in a sealed container to your local service station or recycling center for reclamation. Do not throw it in the trash or pour it on the ground.

Air Cleaner Service

A dirty air cleaner will restrict air flow to the carburetor. To prevent carburetor malfunction, service the air cleaner regularly. Service more frequently when operating the generator in extremely dusty areas.

⚠ WARNING Using gasoline or flammable solvent to clean the filter element can cause a fire or explosion. Use only soapy water or nonflammable solvent.

NOTICE Never run the generator without the air cleaner. Rapid engine wear will result.

1. Remove the wing nut and the air cleaner cover. Remove the elements and separate them. Carefully check both elements for holes or tears and replace if damaged.
2. Foam element: Wash the element in a solution of household detergent and warm water, then rinse thoroughly, or wash in nonflammable or high flash point solvent.


Allow the element to dry thoroughly.

Soak the element in clean engine oil, and squeeze out the excess oil. The engine will smoke during initial start-up if too much oil is left in the foam.

3. Paper element: Tap the element lightly several times on a hard surface to remove excess dirt, or blow compressed air through the filter from the inside out.

Never try to brush the dirt off; brushing will force dirt into the fibers.



Replace the paper element if it is excessively dirty.

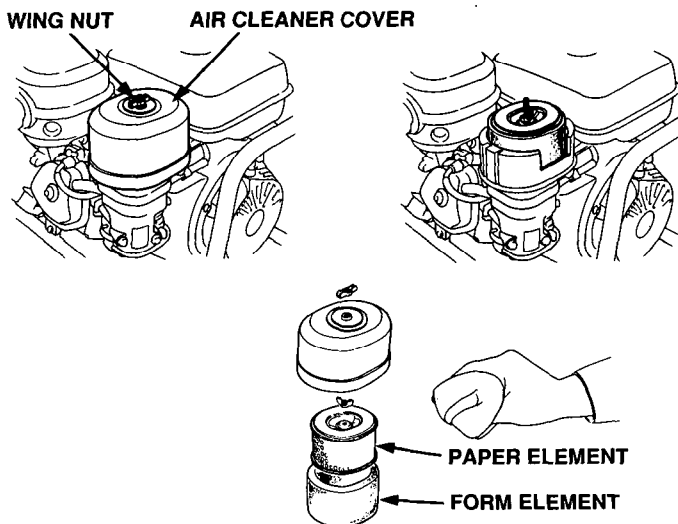

Fuel Sediment Cup Cleaning

The sediment cup prevents dirt or water which may be in the fuel tank from entering the carburetor. If the engine has not been run for a long time, the sediment cup should be cleaned.

1. Turn the fuel valve to the OFF position. Remove the sediment cup, O-ring, and filter.
2. Clean the sediment cup, O-ring, and filter in nonflammable or high flash point solvent.
3. Reinstall the filter, O-ring, and sediment cup.

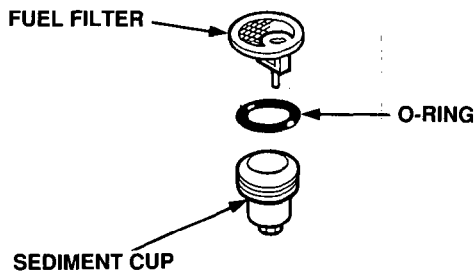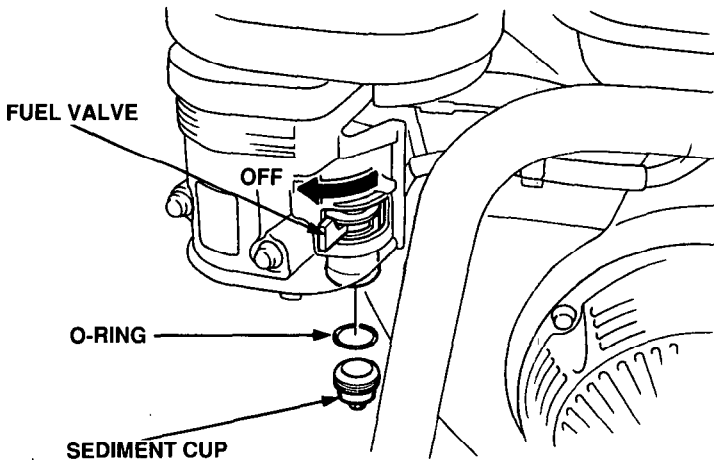

Spark Plug Service

Recommended spark plugs:

BPR5ES (NGK)


W16EPR-U (NIPPONDENSO)

To ensure proper engine operation, the spark plug must be properly gapped and free of deposits.

If the engine has been running, the muffler will be very hot. Be careful not to touch the muffler.


1. Remove the spark plug cap.
2. Clean any dirt from around the spark plug base.
3. Use the wrench supplied in the tool kit to remove the spark plug.

PLUG WRENCH

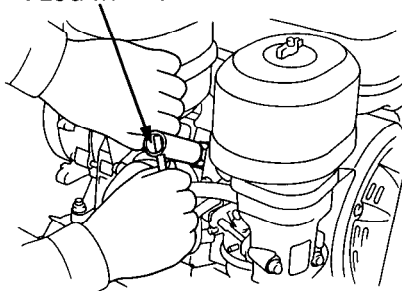

5. Visually inspect the spark plug. Discard it if the insulator is cracked or chipped. Clean the spark plug with a wire brush if it is to be reused.
 6. Measure the plug gap with a feeler gauge.
- correct as necessary by carefully bending the side electrode.

The gap should be: 0.70-0.80 mm (0.028-0.031 in)

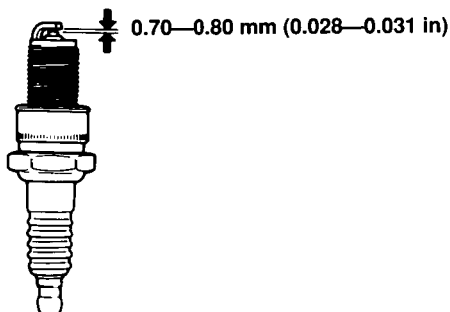

7. Check that the spark plug washer is in good condition, and thread the spark plug in by hand to prevent cross-threading.
8. After the spark plug is seated, tighten with a spark plug wrench to compress the washer.
 - If installing a new spark plug, tighten $1/2$ turn after the spark plug seats to compress the washer. If reinstalling a used spark plug, tighten $1/8$ - $1/4$ turn after the spark plug seats to compress the washer.

NOTICE The spark plug must be securely tightened. An improperly tightened spark plug can become very hot and could damage the engine. Never use spark plug which have an improper heat range. Use only the recommended spark plug or equivalent.



Spark Arrester Maintenance

If the generator has been running, the muffler will be very hot. Allow it to cool before proceeding.

NOTICE The spark arrester must be serviced every 100 hours to maintain its efficiency.

Clean the spark arrester as follows:

1. Remove the eight 5 mm screws ① from the muffler protector ②, and remove the muffler protector.
2. Remove the 4 mm screw ③ from the spark arrester ④, and remove the spark arrester from the muffler ⑤.
3. Use a brush to remove carbon deposits from the spark arrester screen.
4. Inspect the spark arrester for breaks or holes, and replace it if necessary.
5. Install the spark arrester and the muffler in the reverse order of disassembly.

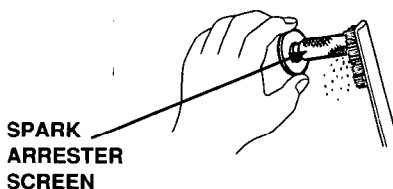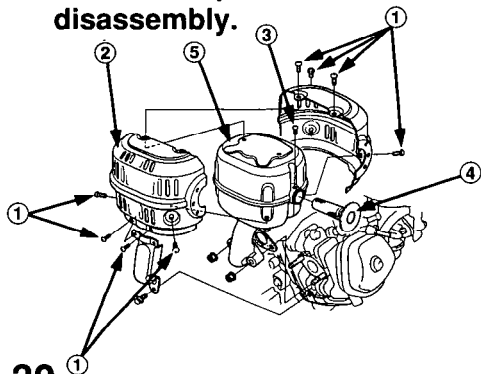

TRANSPORTING/STORAGE

When transporting the generator, turn the engine switch and the fuel valve OFF. Keep the generator level to prevent fuel spillage. Fuel vapor or spilled fuel may ignite.

⚠ WARNING Contact with a hot engine or exhaust system can cause serious burns or fires. Let the engine cool before transporting or storing the generator.

Take care not to drop or strike the generator when transporting. Do not place heavy objects on the generator.

Before storing the unit for an extended period:

1. Be sure the storage area is free of excessive humidity and dust.
2. Service according to the table below:


STORAGE TIME	RECOMMENDED SERVICE PROCEDURE TO PREVENT HARD STARTING
Less than 1 month	No preparation required
1 to 2 months	Fill with fresh gasoline and add gasoline conditioner*.
2 months to 1 year	Fill with fresh gasoline and add gasoline conditioner*. Drain the carburetor float bowl (page 32). Drain the fuel sediment cup (page 28).
1 year or more	Fill with fresh gasoline and add gasoline conditioner*. Drain the carburetor float bowl (page 32). Drain the fuel sediment cup (page 28). Remove the spark plug. Put a tablespoon of engine oil into the cylinder. Turn the engine slowly with the pull rope to distribute the oil. Reinstall the spark plug. Change the engine oil. After removal from storage, drain the stored gasoline into a suitable container, and fill with fresh gasoline before starting.
*Use gasoline conditioners that are formulated to extend storage life. Contact your authorized Honda generator dealer for conditioner recommendations.	

Storage Procedure

1. Drain the carburetor by loosening the drain screw. Drain the gasoline into a suitable container.


⚠ WARNING

Gasoline is extremely flammable and is explosive under certain conditions. Perform this task in a well ventilated area with the engine stopped. Do not smoke or allow flames or sparks in the area during this procedure.




DRAIN SCREW

2. Change the engine oil (page 26).
3. Remove the spark plug, and pour about a tablespoon of clean engine oil into the cylinder. Crank the engine several revolutions to distribute the oil, then reinstall the spark plug.
4. Slowly pull the starter grip until resistance is felt. At this point, the piston is coming up on its compression stroke and both the intake and exhaust valves are closed. Storing the engine in this position will help to protect it from internal corrosion.

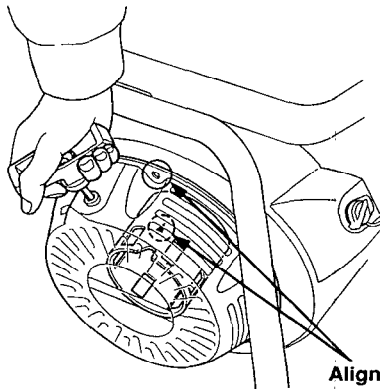


Align the notch on the starter pulley with the hole at the top of recoil starter.

When the engine will not start:

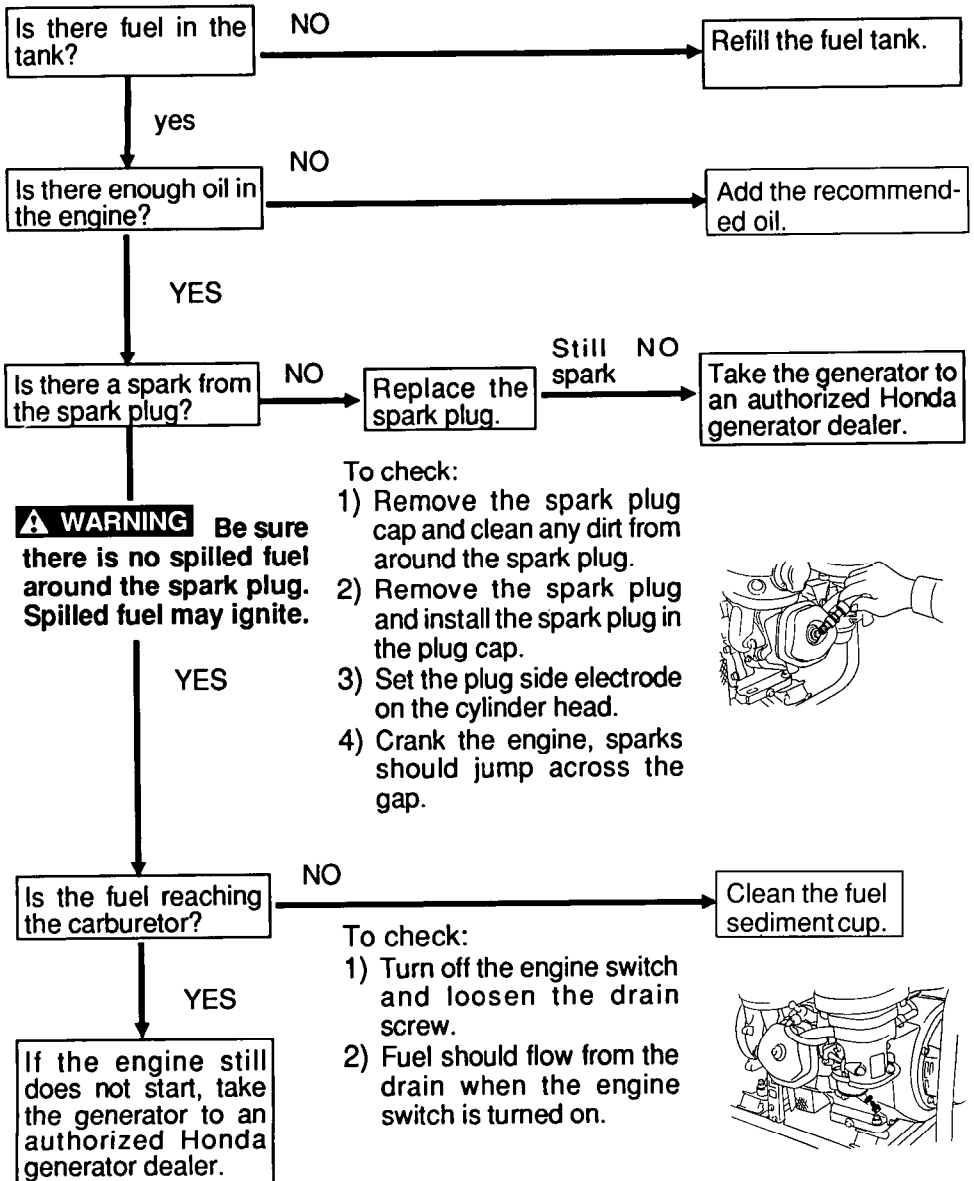

No electricity at the AC receptacles:

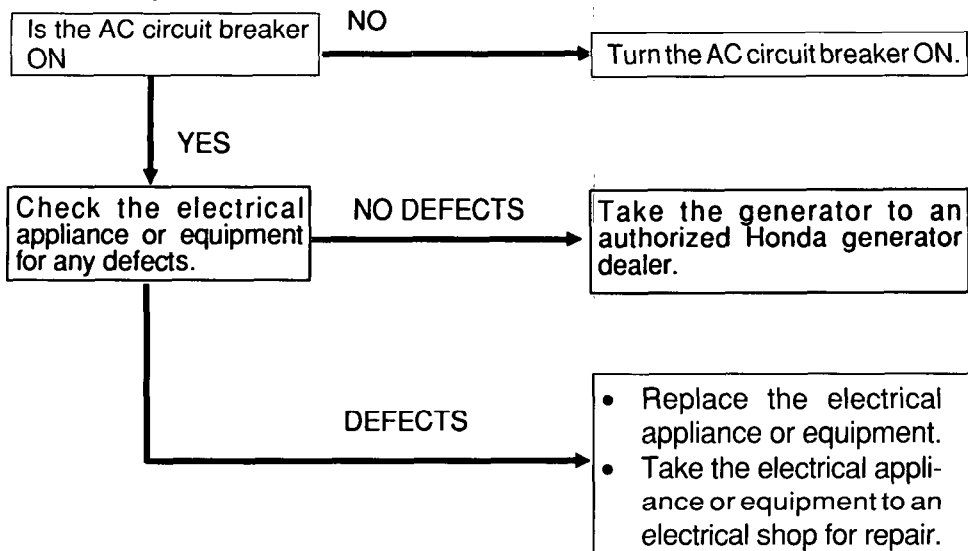

- **EG3500X**



SPECIFICATIONS

Dimensions

Model	EG3500X
Power equipment description code	EA6
Length × Width × Height	655 × 460 × 460 mm (25.8 × 18.1 × 18.1 in)
Dry weight	53.5 kg (117.9 lb)

Engine

Model	GX240K1
Engine type	4-stroke, overhead valve, single cylinder
Displacement (Bore x Stroke)	242 cc (14.8 cu in) [73 x 58 mm (2.9 x 2.3 in)]
Compression ratio	8.2 : 1
Engine speed	3,600 r.p.m.
Cooling system	Forced air
Ignition system	Transistorized magneto
Oil capacity	1.1 ℓ (1.16 US qt, 0.97 Imp qt)
Fuel tank capacity	6.0 ℓ (1.59 US gal, 1.32 Imp gal)
Spark plug	BPR5ES (NGK), W16EPR-U (NIPPONDENSO)

Generator

Model		EG3500X
Type		A
AC output	Rated voltage	120/240 V
	Rated frequency	60 Hz
	Rated ampere	25/12.5 A
	Rated output	3.0 kVA
	Maximum output	3.5 kVA

NOTE: Specifications are subject to change without notice.

CUSTOMER SERVICE INFORMATION

Honda Power Equipment dealership personnel are trained professionals. They should be able to answer any question you may have. If you encounter a problem that your dealer does not solve to your satisfaction, please discuss it with the dealership's management. The Service Manager or General Manager can help. Almost all problems are solved in this way.

If you are dissatisfied with the decision made by the dealership's management, contact the Honda Power Equipment Customer Service Office. You can write to:

American Honda Motor Co., Inc.
Honda Power Equipment Division
Customer Service Office
4475 River Green Parkway
Duluth GA 30136-2565

Or telephone: (404) 497-6400

When you write or call, please give us this information:

- Model and serial numbers (see pages 8 & 9)
- Name of the dealer who sold the generator to you
- Name and address of the dealer who services your generator
- Date of purchase
- Your name, address, and telephone number
- A detailed description of the problem

Current customer service contact information:

United States, Puerto Rico, and U.S. Virgin Islands:

Honda Power Equipment dealership personnel are trained professionals. They should be able to answer any question you may have. If you encounter a problem that your dealer does not solve to your satisfaction, please discuss it with the dealership's management. The Service Manager or General Manager can help. Almost all problems are solved in this way.

If you are dissatisfied with the decision made by the dealership's management, contact the Honda Power Equipment Customer Relations Office. You can write:

American Honda Motor Co., Inc.
Power Equipment Division
Customer Relations Office
4900 Marconi Drive
Alpharetta, GA 30005-8847

Or telephone: (770) 497-6400 M-F, 8:30 am - 7:00 pm EST

When you write or call, please provide the following information:

- Model and serial numbers
- Name of the dealer who sold the Honda power equipment to you
- Name and address of the dealer who services your equipment
- Date of purchase
- Your name, address, and telephone number
- A detailed description of the problem

INDEX

COMPONENT IDENTIFICATION	8
CONTROLS	10
Choke Lever	11
Circuit Breaker	12
Engine Switch	10
Fuel Valve	11
Ground Terminal	12
Oil Alert System	13
Recoil Starter	10
Voltage Selector Switch (Dual Voltage System)	13
CUSTOMER SERVICE INFORMATION	37
GENERATOR USE	14
AC Applications	15
AC Operation	16
AC Receptacle Selection	17
Connections to a Building's Electrical System	14
Ground System	14
High Altitude Operation	18
Special Requirements	14
INDEX	38
MAINTENANCE	24
Air Cleaner Service	27
Engine Oil Change	26
Fuel Sediment Cup Cleaning	28
Maintenance Schedule	24
Spark Arrester Maintenance	30
Spark Plug Service	29
Tool Kit	25

PRE-OPERATION CHECK	19
Engine Oil	19
Fuel Recommendation	20
SAFETY	4
Safety Information	6
Safety Label Locations	4
SPECIFICATIONS	36
STARTING THE ENGINE/STOPPING THE ENGINE	23
TRANSPORTING/STORAGE	31
Storage procedure	32
TROUBLESHOOTING	33
WIRING DIAGRAM	35

MEMO

HONDA
HONDA MOTOR CO., LTD. TOKYO, JAPAN

31ZB4751
00X31-ZB4-7510

K1   10009302
PRINTED IN JAPAN